

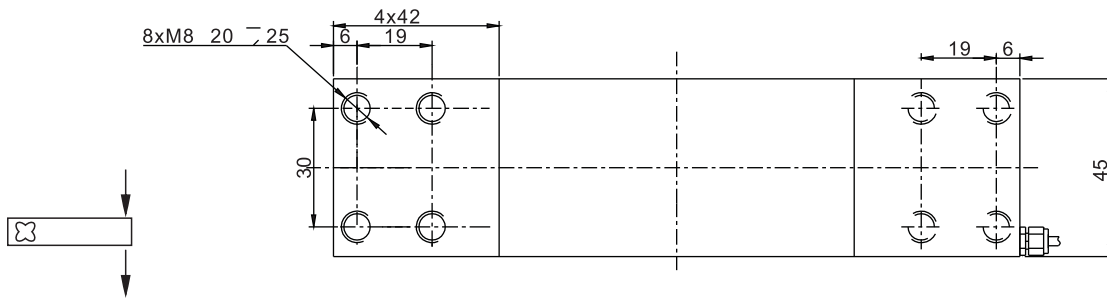


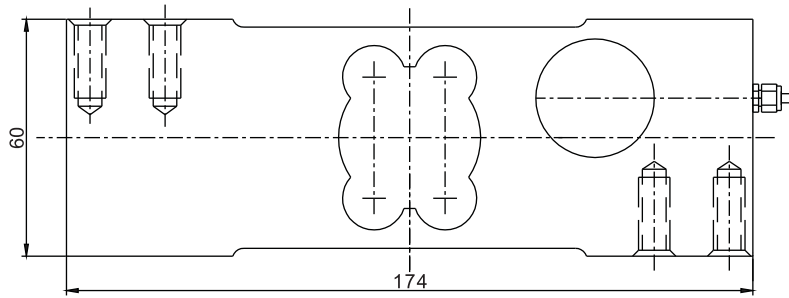

ILE(-SS) Load cell

ILE(-SS)

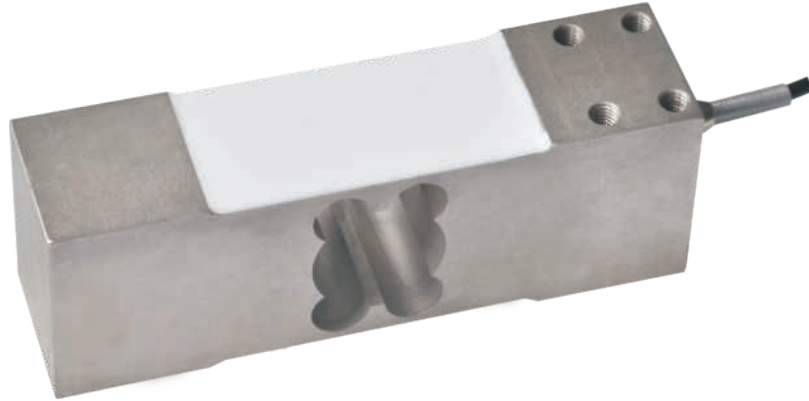

Blending scale, packing scale, dynamic testing system, platform scale

TECHNICAL PARAMETER OAP version 4Wires:Exc+(Blue);Exc-(Black);Sig+(White);Sig-(Red)

Rated capacities(Emax)	40,45,50,60,65,100,150,200,250,300,500,800kg	Temperature range, compensated	≥2000MΩ (50V DC)
Sensitivity	2.0 ± 0.2 mV/V	Temperature range, operating	-20~+50°C
Accuracy class	OIML C3(approving)	Maximum safe overload	150%F.S
Creep (30min)	± 166ppm	Ultimate overload	300%F.S
Zero balance	± 3%Emax	Excitation, recommended	10 V DC
TC ZERO	± 17.5ppm/°C	Excitation, maximum	15 V DC
TC SPAN	+20°C~+40°C, ± 17.5ppm/°C	Protection class	IP65
	-10°C~+20°C, ± 11.67ppm/°C	Construction	Alloy Steel Stainless Steel
Input resistance	404 ± 15Ω	Cable	Length:3m
Output resistance	382 ± 3Ω		Diameter: φ 5mm
Max platform size	500 × 500mm		25N · m